

Art. NTS40

HIDDEN DOOR CLOSER IN THE ALUMINIUM TRANSOM




1 MILLION CYCLES TESTED

PATENTED AND TESTED
IN ACCORDING TO THE EUROPEAN STANDARD
UNI-EN 1154:2003




THERMOSTATIC OIL -18°C +50°C
TESTED TO ENSURE
STABLE CLOSING TIMES
TO THE DIFFERENT TEMPERATURE




SERIES	ARTICLES	FORCE	HOLD OPEN	WEIGHT [KG]	WIDTH UP TO [MM]
NTS40C	20250L	F2	90°	100	700-900
	20251L	F2	110°	100	700-900
	20252L	F2	NO STOP	100	700-900
	20250F	F3	90°	120	900-1000
	20251F	F3	110°	120	900-1000
	20252F	F3	NO STOP	120	900-1000
	20250P	F3 PLUS	90°	130	1000-1200
	20251P	F3 PLUS	110°	130	1000-1200
	20252P	F3 PLUS	NO STOP	130	1000-1200
NTS40	80250	F1→F3	90°	120	900-1200
	80251	F1→F3	110°	120	900-1200
	80252	F1→F3	NO STOP	120	900-1200


SPINDLE 21mm



SPINDLE 15mm



NTS40

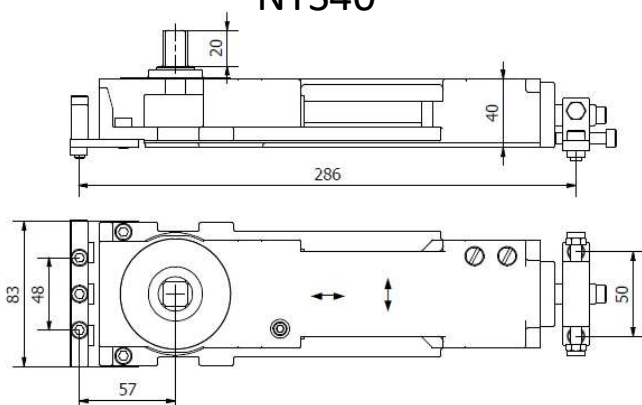

NTS40C

