

Art. TS/68

FLOOR CLOSER





1 MILLION CYCLES TESTED


PATENTED AND TESTED
IN ACCORDING TO THE EUROPEAN STANDARD
UNI-EN 1154:2003



THERMOSTATIC OIL -18°C +50°C
TESTED TO ENSURE
STABLE CLOSING TIMES
TO THE DIFFERENT TEMPERATURE

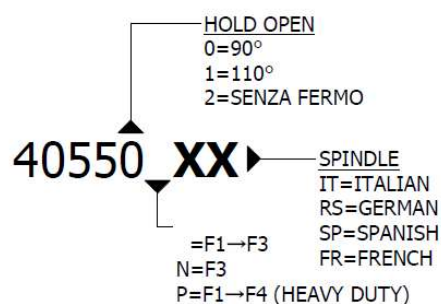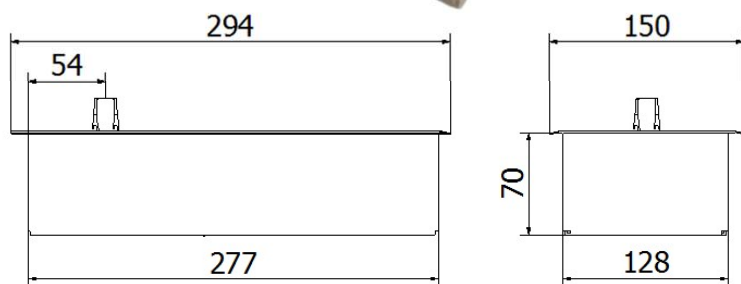

SPINDLES:

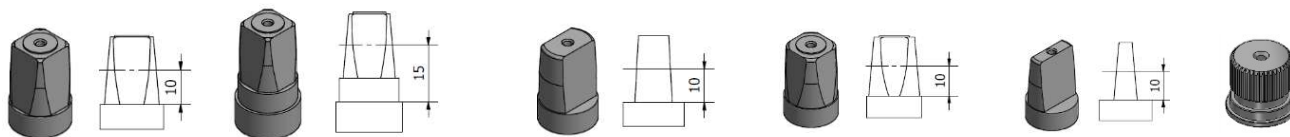

IT

IT+5mm

RS

SF

SP

SPINDLE FOR
Art. AC850

| SERIES | ARTICLES | FORCE | HOLD OPEN | WEIGHT [KG] | WIDTH UP TO [MM] |
|-------------------|----------|-------------|---------------------|--------------------------|------------------|
| TS/68 | 40550 | F2→F3 | 90° | 180 | 700-1100 |
| | 40551 | F2→F3 | 110° | 180 | 700-1100 |
| | 40552 | F→F3 | NO STOP | 180 | 700-1100 |
| | 40550N | F3 | 90° | 150 | 900-1000 |
| | 40551N | F3 | 110° | 150 | 900-1000 |
| | 40552N | F3 | NO STOP | 150 | 900-1000 |
| HEAVY DUTY | 40550P | F2→F4 | 90° | 220 | 900-1250 |
| | 40551P | F2→F4 | 110° | 220 | 900-1250 |
| | 40552P | F2→F4 | NO STOP | 220 | 900-1250 |
| | ARTICLE | DESCRIPTION | FINISH | CODE | |
| | COVER | | STAINLESS STEEL | INOX | |
| | | | POLISHED BRASS | OT.LUX | |
| | BOX CASE | | STEEL PAINTED | STANDARD | |
| | | | STAINLESS STEEL 304 | BOX CASE STAINLESS STEEL | |

* THE STANDARD PACKAGE INCLUDES THE STANDARD BOX CASE AND STAINLESS STEEL COVER AISI 304